



**METHOD (10) FOR MAKING A PIECE OF  
SIMULATED STAINED-GLASS (12)**

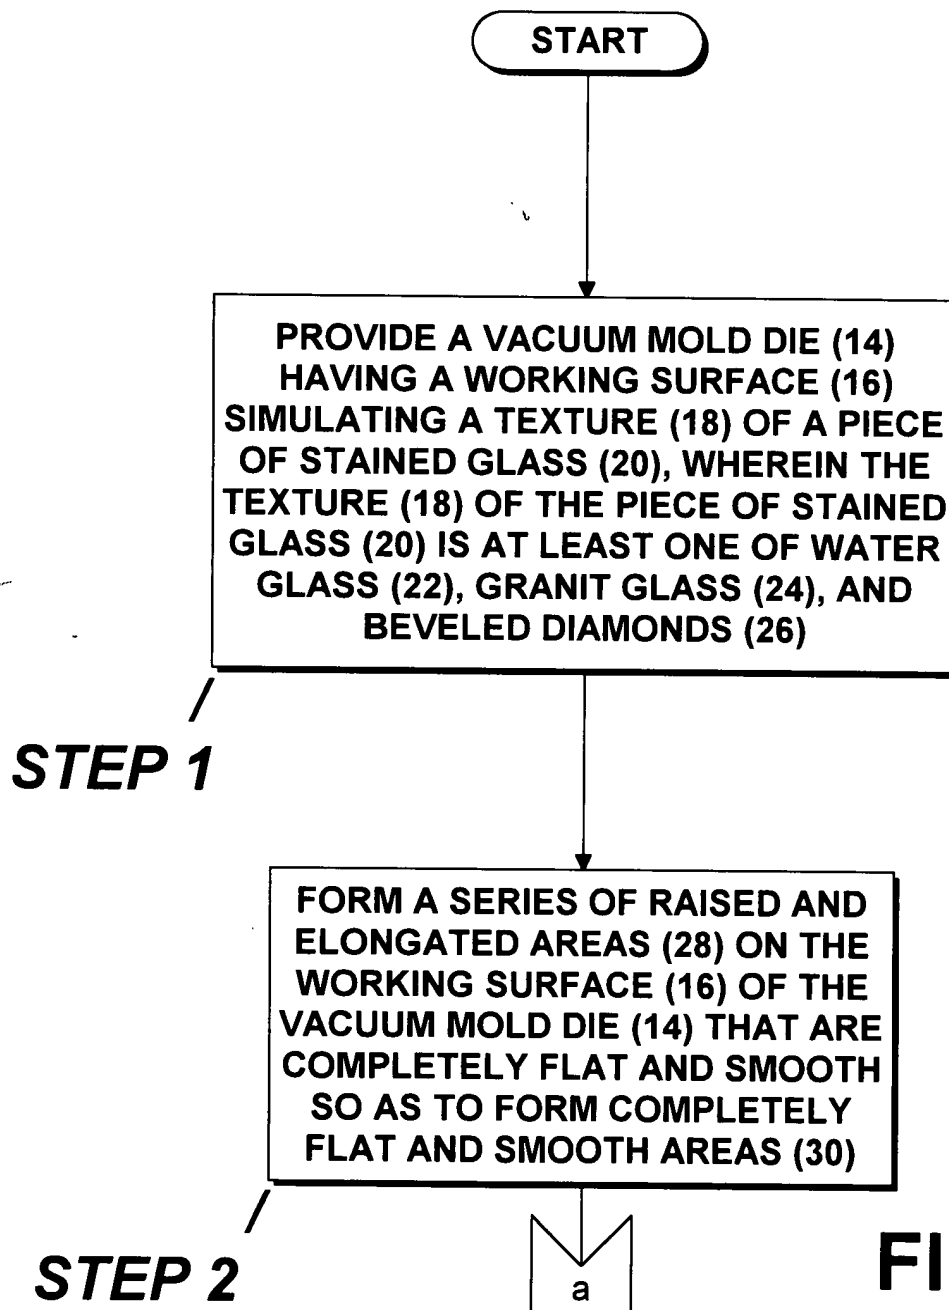

**FIG. 1A**

20072535-020802

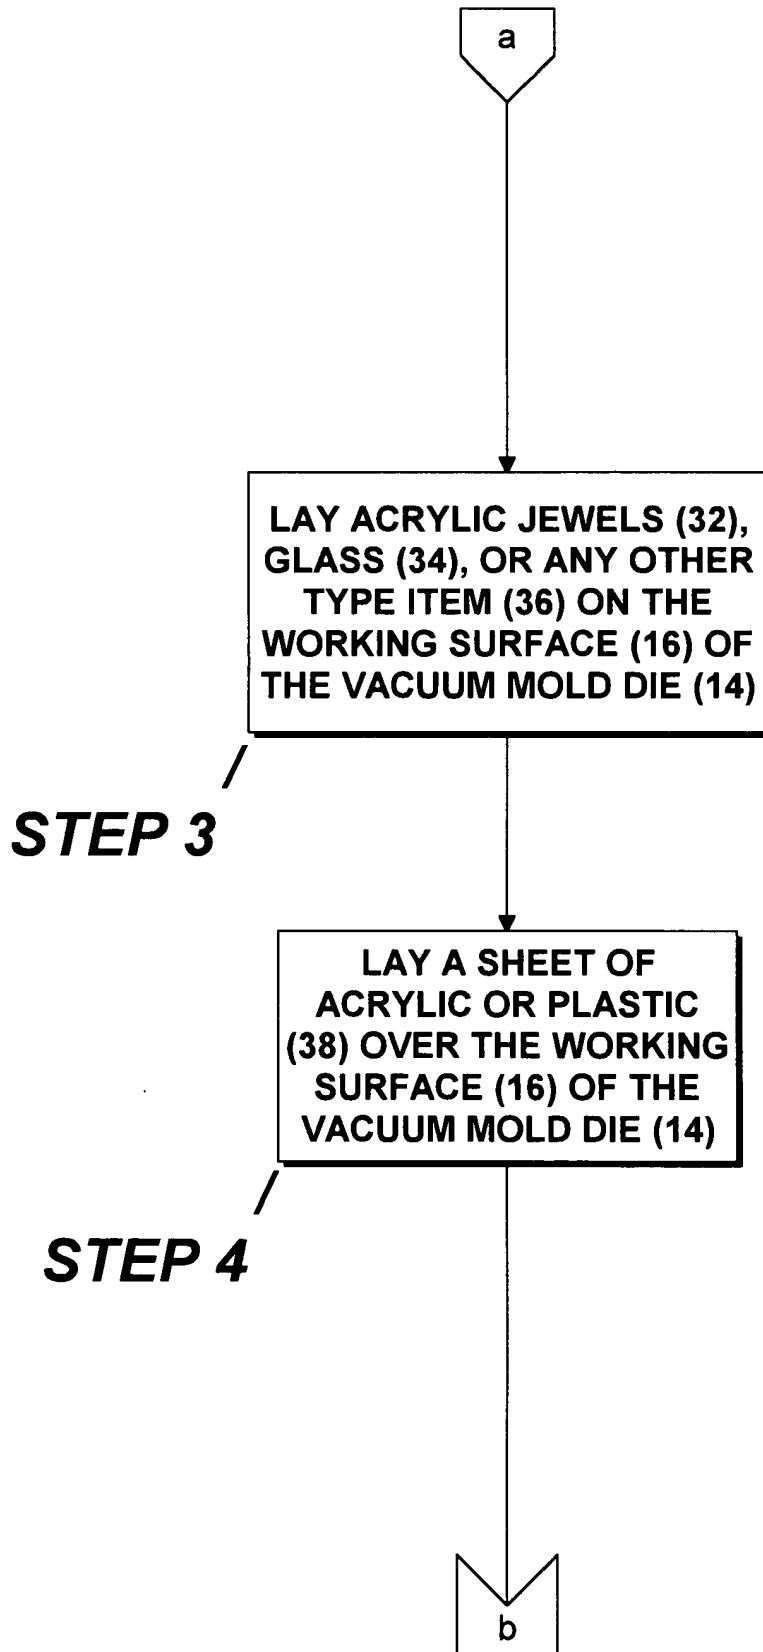

**FIG. 1B**

b

VACUUM FORM THE SHEET OF ACRYLIC OR PLASTIC (38), WITH THE AT LEAST ONE OF THE ACRYLIC JEWELS (32), THE GLASS (34), AND THE ANY OTHER TYPE ITEM (34) BEING ATTACHED TO, BY BEING SUCKED INTO, THE SHEET OF ACRYLIC OR PLASTIC (38) FOR ADDED EFFECTS, SO AS TO FORM A SHEET OF VACUUM FORMED ACRYLIC OR PLASTIC (40) HAVING RECESSED FLATS (42) ON A MOLD-FACING SURFACE (44) THEREOF AND RAISED FLATS (46) ON AN AMBIENT-FACING SURFACE (48) THEREOF THAT OPPOSE THE RECESSED FLATS (42), BY VIRTUE OF THE SERIES OF COMPLETELY FLAT AND SMOOTH, RAISED AND ELONGATED AREAS (30) ON THE WORKING SURFACE (16) OF THE VACUUM MOLD DIE (14)

**STEP 5**

GLUE PRESSURE SENSITIVE SELF-STICK LEAD STRIPS (50) TO THE RECESSED FLATS (42) ON THE MOLD-FACING SURFACE (44) OF THE SHEET OF VACUUM FORMED ACRYLIC OR PLASTIC (38) AND THE RAISED FLATS (46) ON THE AMBIENT-FACING SURFACE (48) OF THE SHEET OF VACUUM FORMED ACRYLIC OR PLASTIC (38)


**STEP 6**

c

**FIG. 1C**

10072535.020302

20250525-020802

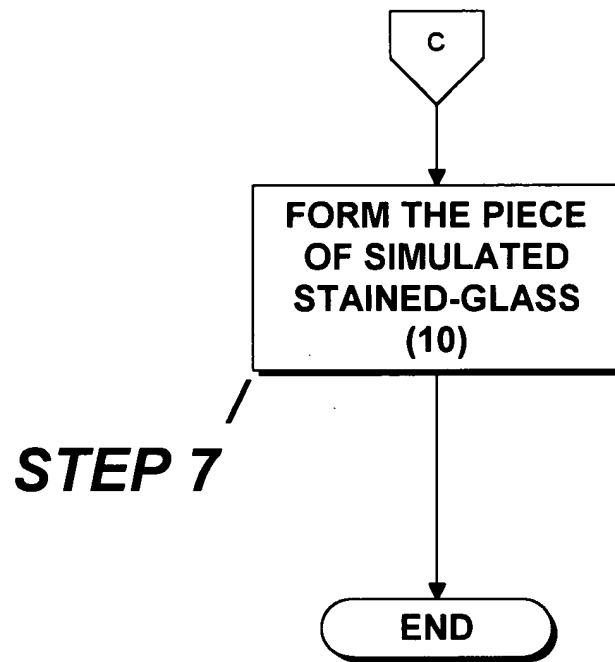

**FIG. 1D**